



材料/Material:SP4W


Pcv-Temperature

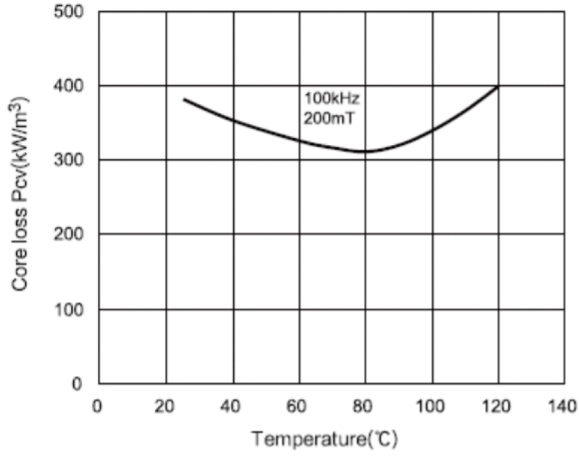


μ_a -Bm

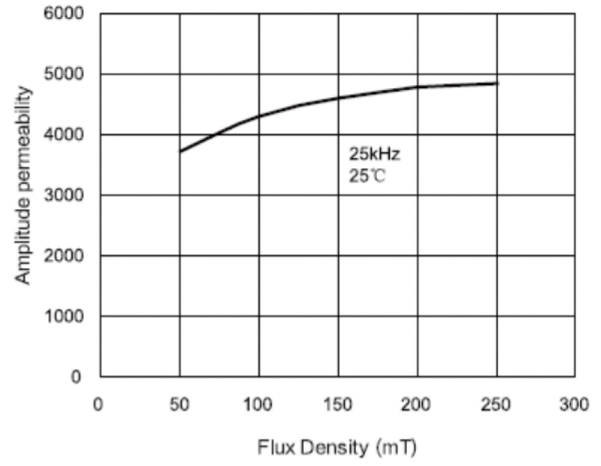

Pcv-Bm

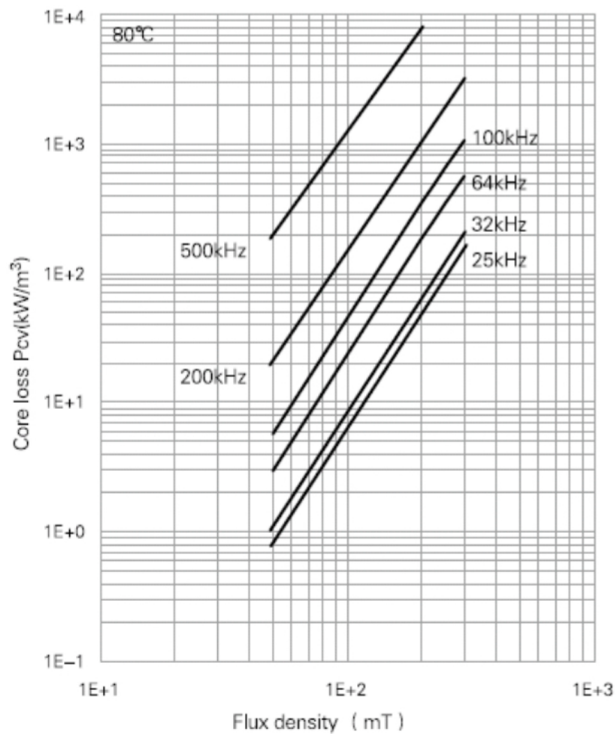




Pcv-Bm

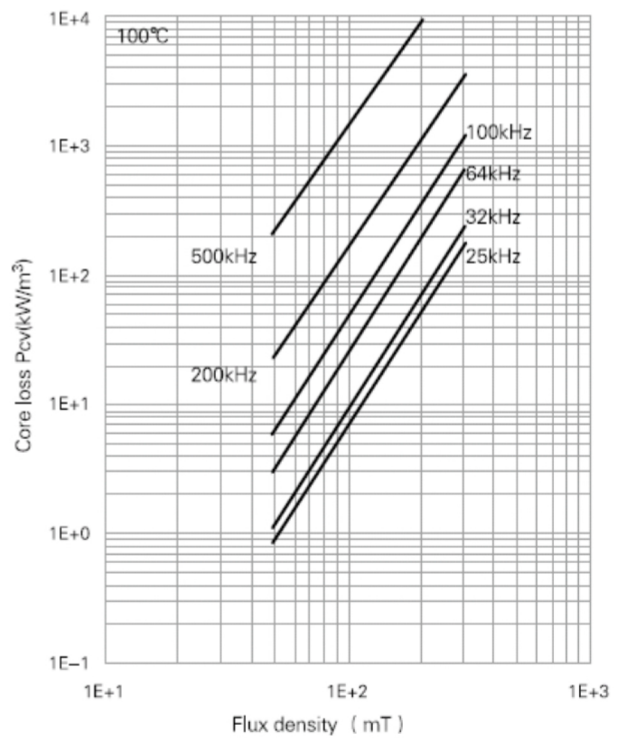

材料/Material: SP4W

特点/Features:

1. 宽温度低损耗/Low Core Loss in a Wide Temperature Ranges
2. 高饱和磁感应强度/High Saturation Flux Density

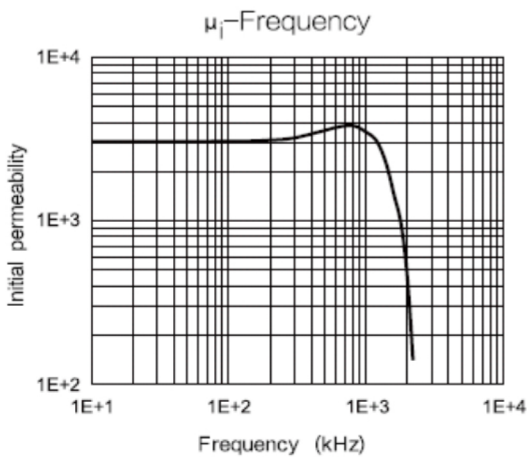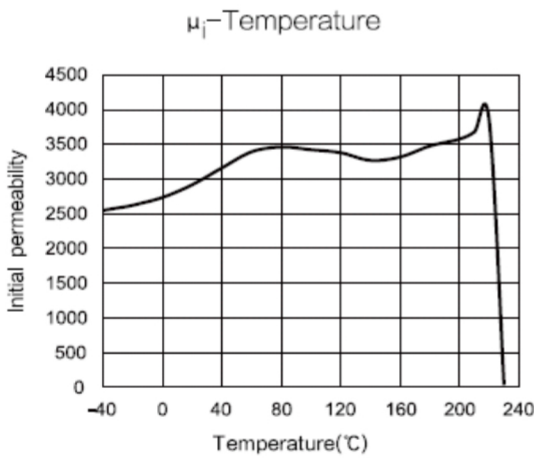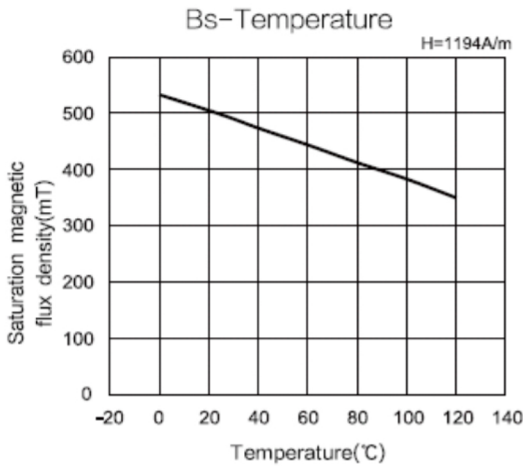

Initial permeability	μ_i	25°C	3000±25%	
Saturation magnetic flux density	B_s (mT)	25°C	500	
		100°C	390	
Remanence	B_r (mT)	25°C	50	
		100°C	55	
Coercivity	H_c (A/m)	25°C	8	
		100°C	9	
Core loss	P_{cv} (kW/m ³)	25°C	400	
		100kHz 200mT	100°C	350
			120°C	400
Curie temperature	T_c (°C)		≥220	
Electrical resistivity	ρ (Ω·m)		4	
Density	d (kg/m ³)		4.8×10 ³	

Test core: Toroid(mm)

OD: 25

ID: 15

H: 7.5

